



TECEdrainpoint S Assortment List



# TECEdrainpoint S – DRAINAGE RIGHT TO THE POINT

TECEdrainpoint S: The streamlined alternative to confusing "complete ranges".

The modular system – small range, countless application areas:

Put together "your" drain set from a simple modular system. Choose the drain, drain top, grate and accessories to meet your requirements. Everything fits together and can be combined any way you wish.


Complete drain systems: it couldn't be easier! Four drain sets are available for the most common applications.

Standardised Seal System universal flange. Just one flange design for liquid and strip composite seals or clamped flange connections.

Certified seal safety through the "Seal System". More than 50 independent combination checks with sealing systems from renowned manufacturers set new standards for safety when connecting composite seals to the drain.

# THE TECEdrainpoint S MODULAR PRINCIPLE - INDIVIDUAL BUT STILL SIMPLE


The free combination of all drains, drain tops and other accessories reduces the costs for storage and greatly simplifies ordering.

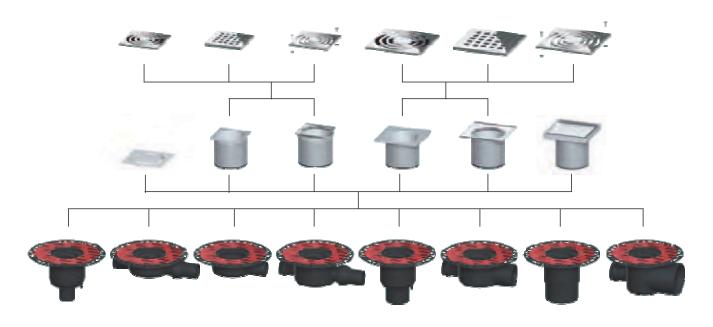

### THE SEAL SYSTEM UNIVERSAL FLANGE

The Seal System universal flange enables two sealing options to be connected with a flange.

Composite seals (A) or clamped flange connections (B) can be used e.g. to connect bitumen membrane sheets.

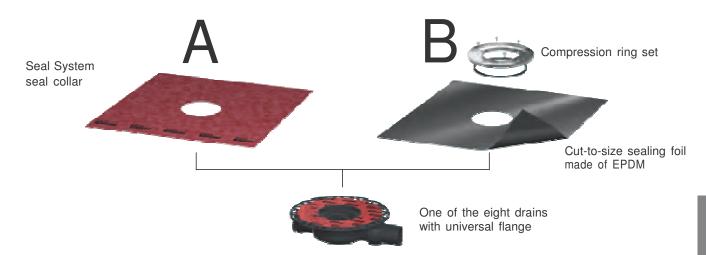

# TECEdrainpoint S FIRE PROTECTION SET FIRESTOP EI 120

TECEdrainpoint S fire protection set for direct installation at the TECEdrainpoint S DN 50 rain vertical for highly fire resistant partitioning of ceiling bushings in solid ceilings for up to 120 minutes. Classification in accordance with DIN EN 13501 for fire protection class EI 120.



The new two-stage odour trap (sealing lip membrane and sealing water) for all horizontal and vertical TECE drains reliably prevents unpleasant odours. The inner sealing lip membrane serves as protection against evaporation, an odour trap and vermin barrier. The membrane odour trap also works without water and is therefore superior to conventional odour traps.

# TECEdrainpoint S SOUND-INSULATED ASSEMBLY FEET

To make it easy to adjust the height and for fixing Drainpoint S drains with universal flange in the bare-wall fitting stage. The set of four assembly feet is delivered incl. sound-proofing element and mounting material.







### POINT, LINE - SEALED!

Seal System – the new sealing standard for TECE drains and shower channels



### What is Seal System?

Seal System offers TECE installers and tilers tested safety when connecting composite seals to TECEdrainpoint S drains ans TECEdrainline channels. The testing was done by the independent testing institute Kiwa TBU, and was performed according to the building authorities test criteria applicable in Germany. 50 sealing products from well-known manufacturers were successfully tested and certified. For this purpose, the functional safety (water-tightness) of the composite sealing products was tested with the TECE drainage products.


A list of all the certified composite seals can be called up at www.sealsystem.net.

The TECEdrainpoint S Seal System consists of the following components:

- 1. TECEdrainpoint S drain
- 2. Seal System seal sleeve
- 3. one of the 50 tested and certified sealing products



Example of the Seal System seal of a TECEdrainpoint S drain with a certified sealing product. A certificate is available for each product which passed the test.

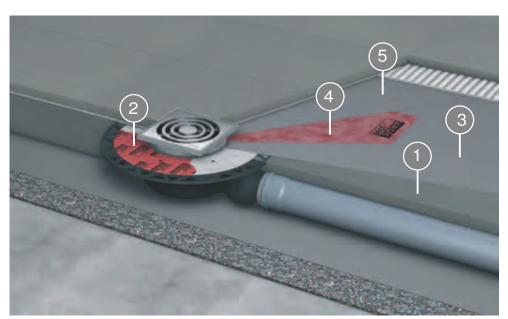



- 1 Screed
- Protective film
  Drain flange
- First coat slurry seal
- Seal System
  Sealing sleeve
- Second coat slurry seal



	Page
Drain sets	162–164
Drain modular system	165–168
Accessories	169–177
Spare parts	178

You can find an overview of valid declaration of performance (DOP) at www.tece.com



### THE NEW STANDARD REFERENCE WORK ON COMPOSITE SEALING

The 272 page standard reference work for the certified composite seal. With more than 100 basic testing certificates issued by KIWA TBU in Greven relating to point and linear drains, at a price of 36 euros incl. VAT, available from booksellers, ISBN 978-3-00-040275-3. This book is only available in German language.

### POINT. LINE. SEALED!

by Martin Krabbe, Reinhold P. Bäder et al.

With information to help with the planning and installation of sealing systems in sanitary facilities, notes on the waterproofing of buildings and floor structures incorporating drainage solutions and explanatory notes on the relevant standards.

## TECEdrainpoint S - Drain sets

TECEdrainpoint S 50 drain set extra-flat

Drain set TECEdrainpoint S 50 horizontal, extra-flat DN 50

#### Components:

Drain body DN 50 horizontal extra-flat made of plastic (PP) With retaining edge

With removable odour trap

Drainage capacity from 0.81 to 1.12 l/s

Reduced sealing water height = 30 mm

Drain top with grate frame made of plastic (ABS) and O-ring seal

TECEdrainpoint S design grate made of drawn stainless steel, material 1.4301 (304), dimension 100 x 100 mm polished surface, load class K3 (load of up to 300 kg)

Delivery incl. protective cap, foil for the construction site and assembly instructions.

	DU 2	
360 10 50 1 pc.	10 pcs.	

Rs. 3350

TECEdrainpoint S 110 drain set extra-flat with Seal System\*\* universal flange

Drain set TECEdrainpoint S 110 horizontal, extra-flat DN 50

#### Components

Drain body DN 50 horizontal extra-flat made of plastic (PP) with universal flange to connect composite seals or clamped flange connections

With ball joint

With lateral inflow DN 40 incl. closure plug

With removable 2-stage membrane odour trap

Drainage capacity from 0.62 to 0.98  $\ensuremath{\text{l/s}}$ 

Reduced sealing water height = 30 mm

Drain top with grate frame made of plastic (ABS) and O-ring seal  $\,$ 


TECEdrainpoint S design grate made of drawn stainless steel, material 1.4301 (304), dimension  $100 \times 100$  mm polished surface, load class K3 (load of up to 300 kg)


Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately - depending on the seal type:


Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal

Order No.	DU 1	DU 2
360 11 00	1 pc.	10 pcs.
Rs. 2200		











TECEdrainpoint S 112 drain set extra-flat with Seal System\*\* universal flange and membrane odour trap

Drain set TECEdrainpoint S 112 horizontal extra-flat DN 50, stainless steel grate frame with stainless steel design grate, 2-stage membrane odour trap DN 50

#### Components:

Drain body DN 50 horizontal extra-flat made of plastic (PP) With universal flange to connect composite seals or clamped flange connections

With ball joint

With lateral inflow DN 40 incl. closure plug

With removable 2-stage membrane odour trap

Drainage capacity from 0.62 to 0.98 l/s

Reduced sealing water height = 20 mm

Drain top made of plastic (ABS) and O-ring seal

Grate frame made of drawn stainless steel, material 1.4301 (304), for grate dimension  $100 \times 100 \text{ mm}$ 

TECEdrainpoint S design grate made of drawn stainless steel, material 1.4301 (304), dimension 100 x 100 mm polished surface, load class K3 (load of up to 300 kg)

Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately – depending on the seal type:

Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal Compression ring set and cut-to-size sealing foil for clamped

Compression ring set and cut-to-size sealing foil for clamped flange connections

Order No.	DU 1	DU 2
260 11 02* NEW	1 nc	10 noc

TECEdrainpoint S 120 drain set standard with Seal System\*\* universal flange

Floor drain set TECEdrainpoint S 120 horizontal, standard DN 50, tested to DIN EN 1253

#### Components:

Drain body DN 50 horizontal standard made of plastic (PP) With universal flange to connect composite seals or clamped flange connections

With ball joint

With lateral inflow DN 40 incl. closure plug

With removable odour trap

Drainage capacity from 0.97 to 1.17 l/s

Sealing water height = 50 mm in keeping with standard DIN EN 1253

Drain top with grate frame made of plastic (ABS) and O-ring seal

TECEdrainpoint design grate made of drawn stainless steel, material 1.4301 (304), dimension 100 x 100 mm polished surface, load class K3 (load of up to 300 kg)

Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately - depending on the seal type:


Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal

Compression ring set and cut-to-size sealing foil for clamped flange connections

 Order No.
 DU 1
 DU 2

 360 12 00
 1 pc.
 10 pcs.



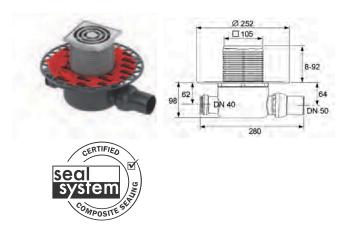

# TECEdrainpoint S - Drain sets

TECEdrainpoint S 122 drain set DN 50 standard with Seal System\*\* universal flange

Drain set TECEdrainpoint S 122 horizontal, standard DN 50, stainless steel grate frame with stainless steel design grate, 2-stage membrane odour traps

#### Components

Drain body DN 50 horizontal standard made of plastic (PP) With universal flange to connect composite seals or clamped flange connections

With ball joint

With lateral inflow DN 40 incl. closure plug

With removable 2-stage membrane odour trap

Drainage capacity from 0.97 to 1.17 l/s

Sealing water height = 50 mm in keeping with standard DIN EN 1253

Drain top made of plastic (ABS) and O-ring seal

Grate frame made of drawn stainless steel, material 1.4301 (304), for grate dimension 100  $\times$  100 mm

TECEdrainpoint design grate made of drawn stainless steel, material 1.4301 (304), dimension 100 x 100 mm polished surface, load class K3 (load of up to 300 kg)

Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately – depending on the seal type:

Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal

Compression ring set and cut-to-size sealing foil for clamped flange connections

Order No.		DU 1	DU 2
360 12 02*	NEW	1 pc.	10 pcs.

TECEdrainpoint S 130 drain set vertical with Seal System\*\* universal flange

Floor drain set TECEdrainpoint S 130 vertical DN 50, tested to DIN EN 1253

### Components:

Drain body DN 50 vertical made of plastic (PP)

With universal flange to connect composite seals or clamped flange connections

With removable odour trap

Drainage capacity from 1.36 to 1.52 l/s

Sealing water height = 50 mm in keeping with standard DIN EN 1253

Drain top with grate frame made of plastic (ABS) and O-ring seal  $\,$ 

TECEdrainpoint design grate made of drawn stainless steel, material 1.4301 (304), dimension  $100 \times 100$  mm polished surface, load class K3 (load of up to 300 kg)

Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately – depending on the seal type:

Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal

Compression ring set and cut-to-size sealing foil for clamped flange connections


 Order No.
 DU 1
 DU 2

 360 13 00
 1 pc.
 10 pcs.


Rs. 4350

NEW







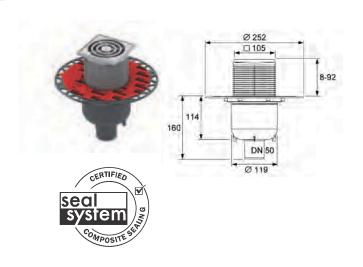

TECEdrainpoint S drain DN 50 extra-flat with Seal System\*\* universal flange

Floor drain TECEdrainpoint S DN 50 horizontal extra-flat made of plastic (PP)

With universal flange to connect composite seals or clamped flange connections

With ball joint

With lateral inflow DN 40 incl. closure plug

With removable odour trap

Drainage capacity from 0.61 to 0.98 l/s

Reduced sealing water height = 30 mm

Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately - depending on the seal type:

Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal

Compression ring set and cut-to-size sealing foil for clamped flange connections

Order No.	DU 1	
360 14 00	1 pc.	
Rs. 2450		

TECEdrainpoint S drain DN 50 terrace with Seal System\*\* universal flange

Floor drain TECEdrainpoint DN 50 as terrace or balcony drain, horizontal extra-flat made of plastic (PP)

With universal flange to connect composite seals or clamped flange connections

Without odour trap

Drainage capacity from 1.10 to 1.90 l/s


Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately – depending on the seal type:


Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal

Compression ring set and cut-to-size sealing foil for clamped flange connections

Order No.	DU 1
360 14 01	1 pc.







### TECEdrainpoint S – drain modular system

TECEdrainpoint S drain DN 50 standard with Seal System\*\* universal flange

Floor drain TECEdrainpoint S DN 50 horizontal standard made of plastic (PP) tested to DIN EN 1253

With universal flange to connect composite seals or clamped flange connections

With ball joint

With lateral inflow DN 40 incl. closure plug

With removable odour trap

Drainage capacity from 0.97 to 1.17 l/s

Sealing water height = 50 mm in keeping with standard

**DIN EN 1253** 

Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately - depending on the seal type:

Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal

Compression ring set and cut-to-size sealing foil for clamped flange connections

Order No.	DU 1	
360 15 00	1 pc.	
Rs. 2700		

TECEdrainpoint S drain DN 50 vertical with Seal System\*\* universal flange

Floor drain TECEdrainpoint S DN 50 vertical made of plastic (PP) tested to DIN EN 1253  $\,$ 

With universal flange to connect composite seals or clamped flange connections

With removable odour trap

Drainage capacity from 1.36 to 1.52 l/s

Sealing water height = 50 mm in keeping with standard

**DIN EN 1253** 


Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately – depending on the seal type:

Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal


Compression ring set and cut-to-size sealing foil for clamped flange connections

Order No.	DU 1	
360 16 00	1 pc.	
Rs. 2700		











TECEdrainpoint S drain DN 70 with Seal System\*\* universal flange Floor drain TECEdrainpoint S DN 70 horizontal made of plastic (PP) tested to DIN EN 1253

With universal flange to connect composite seals or clamped flange connections
With lateral inflow DN 50 incl. closure plug
With removable odour trap

Drainage capacity from 1.24 to 1.64 l/s Sealing water height = 50 mm in keeping with standard

DIN EN 1253

Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately – depending on the seal type:

Seal System  $\ensuremath{^{**}}$  sealing sleeve for the execution of a tested and certified connection of the composite seal

Compression ring set and cut-to-size sealing foil for clamped flange connections

Order No.	DU 1
360 35 00	1 pc.

Rs. 2700

TECEdrainpoint S drain DN 70 vertical with Seal System\*\* universal flange

Floor drain TECEdrainpoint S DN 70 vertical made of plastic (PP) tested to DIN EN 1253

With universal flange to connect composite seals or clamped flange connections

With removable odour trap

Drainage capacity from 1.49 to 2.07 l/s

Sealing water height = 50 mm in keeping with standard DIN EN 1253


Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately - depending on the seal type:


Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal

Compression ring set and cut-to-size sealing foil for clamped flange connections

Order No. DU 1	
360 36 00 1 pc.	









### TECEdrainpoint S – drain modular system

TECEdrainpoint S drain DN 100 with Seal System\*\* universal flange

Floor drain TECEdrainpoint S DN 100 horizontal made of plastic (PP)

With universal flange to connect composite seals or clamped flange connections

With lateral inflow DN 50 incl. closure plug

With removable odour trap

Drainage capacity from 1.22 to 1.75 l/s

Sealing water height = 50 mm in keeping with standard

DIN EN 1253

Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately - depending on the seal type:

Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal

Compression ring set and cut-to-size sealing foil for clamped flange connections

Order No.	DU 1
360 75 00	1 pc.
Rs. 2700	

TECEdrainpoint S drain DN 100 vertical with Seal System\*\* universal flange

Floor drain TECEdrainpoint S DN 100 horizontal made of plastic (PP)  $\,$ 

With universal flange to connect composite seals or clamped flange connections

With removable odour trap

Drainage capacity from 1.11 to 1.62 l/s

Sealing water height = 50 mm in keeping with standard DIN EN 1253

Delivery incl. protective cap and foil for the construction site and assembly instructions.

Please order separately - depending on the seal type:

Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the composite seal


Compression ring set and cut-to-size sealing foil for clamped flange connections

Order No.	DU 1
360 76 00	1 pc.











TECEdrainpoint

TECEdrainpoint S Fire Protection Set Fire Stop El 120 DN 50

TECEdrainpoint S fire protection set for direct installation at the TECEdrainpoint S DN 50 drain vertical for highly fire resistant partitioning of ceiling bushings in solid ceilings for up to 120 minutes. Classification in accordance with DIN EN 13501 for fire protection class EI 120.

The set consists of fire protection sleeve, 2 cross-recessed screws, identification plate.

Required core drill hole:

Diameter 120 mm (min = 119 mm, max = 123 mm)

Application area:

Solid ceilings from 150 mm to 325 mm ceiling thickness.

Connection lead:

PP-HT pipe according to DIN EN 1451 (minimum length 100 mm) No grouting or filling of the gap is necessary.

Order No.		DU 1	
369 00 50	NEW	1 pc.	

Rs. 18500

TECEdrainpoint S grate frame stainless steel, 100 mm, incl. "frameless" tile base

Set with stainless steel grate frame and tileable, frameless tile base 100  $\times$  100 mm

Outer diameter = 110 mm

Height adjustment = none, height 1 mm (suitable for all tile/natural stone thicknesses)

Grate frame made of drawn stainless steel, material 1.4301 (304)

Frameless tile base made of stainless steel, material 1.4301 (304),

dDimension 100 x 100 mm polished surface, load class K3 (load of up to 300 kg)

Order No.	DU 1
366 00 16 * NEW	1 pc.

TECEdrainpoint S grate frame stainless steel, 150 mm, incl. "plate" tileable channel

Set consisting of drain top with stainless steel grate frame and "plate" tileable channel 142 x 142 mm

Drain top made of plastic (ABS)

O-ring seal

Outer diameter = 110 mm


Height adjustment = 23 to 118 mm

Grate frame made of drawn stainless steel, material 1.4301 (304)

"plate" stainless steel tileable channel, material 1.4301 (304), dimension 142 x 142 mm polished surface, load class K3 (load of up to 300 kg)


Order No.	DU 1
366 00 11* <b>NEW</b>	1 pc.






NEW





**NEW** 





# TECEdrainpoint S – accessories

TECEdrainpoint S drain grate frame plastic, 100 mm, incl. design grate


Set consisting of drain top with grate frame (plastic) and TECEdrainpoint S design grate 100  $\times$  100 mm

Drain top with grate frame made of plastic (ABS) O-ring seal

Outer diameter = 110 mm Height adjustment = 8 to 92 mm

TECEdrainpoint design grate made of drawn stainless steel, material 1.4301 (304), dimension  $100 \times 100$  mm polished surface, load class K3 (load up to 300 kg)





Order No.	DU 1
366 00 01	1 pc.

Rs. 1900


TECEdrainpoint S drain grate frame stainless steel, 100 mm, incl. design grate

Set consisting of drain top with grate frame (stainless steel) and TECEdrainpoint S design grate 100  $\times$  100 mm

Drain top made of plastic (ABS)
O-ring seal
Outer diameter = 110 mm
Height adjustment = 7 to 89 mm
Grate frame made of drawn stainless steel,
material 1.4301 (304)
TECEdrainpoint design grate made of drawn

TECEdrainpoint design grate made of drawn stainless steel, material 1.4301 (304), dimension 100 x 100 mm polished surface, load class K3 (load up to 300 kg)





Order No.	DU 1
366 00 02	1 pc.


TECEdrainpoint S drain grate frame stainless steel, 100 mm, incl. design grate, screw-down

Set consisting of drain top with grate frame (stainless steel) and TECEdrainpoint S design grate 100 x 100 mm

Drain top made of plastic (ABS) O-ring seal Outer diameter = 110 mm Height adjustment = 7 to 89 mm Grate frame made of drawn stainless steel, material 1.4301 (304) TECEdrainpoint design grate made of drawn stainless steel, material 1.4301 (304), dimension 100 x 100 mm polished surface, load class K3 (load up to 300 kg)

2 stainless steel countersunk screws and self-cutting threaded





DU 1 Order No. 366 00 09 NEW 1 pc.

Rs. 2800

bushes


TECEdrainpoint S drain grate frame plastic, 150 mm, incl. design grate

Set consisting of drain top with grate frame (plastic) and TECEdrainpoint S design grate 142 x 142 mm

Drain top with grate frame made of plastic (ABS) O-ring seal Outer diameter = 110 mm Height adjustment = 12 to 92 mm TECEdrainpoint design grate made of drawn stainless steel, material 1.4301 (304), dimension 142 x 142 mm polished

surface, load class K3 (load up to 300 kg)





Order No. DU 1 366 00 03 1 pc.


Rs. 2450

TECEdrainpoint S drain grate frame stainless steel, 150 mm, incl. design grate

Set consisting of drain top with grate frame (stainless steel) and TECEdrainpoint S design grate 142 x 142 mm

Drain top made of plastic (ABS) O-ring seal Outer diameter = 110 mm Height adjustment = 9 to 104 mm Grate frame made of drawn stainless steel, material 1.4301 (304) TECEdrainpoint design grate made of drawn stainless steel, material 1.4301 (304), dimension 142 x 142 mm polished surface, load class K3 (load up to 300 kg)





Order No. DU 1 366 00 04 1 pc.

# TECEdrainpoint S – accessories

TECEdrainpoint S drain grate frame stainless steel, 150 mm, incl. design grate, screw-down

Set consisting of drain top with grate frame (stainless steel) and TECEdrainpoint S design grate 142 x 142 mm

Drain top made of plastic (ABS) O-ring seal Outer diameter = 110 mm Height adjustment = 9 to 104 mm Grate frame made of drawn stainless steel, material 1.4301 (304) TECEdrainpoint design grate made of drawn stainless steel, material 1.4301 (304), dimension 142 x 142 mm polished surface, load class K3 (load up to 300 kg) 2 stainless steel countersunk screws and self-cutting threaded bushes

Order No.	DU 1
366 00 10 <b>NEW</b>	1 pc.

Rs. 3700

TECEdrainpoint S raising element with Seal System\*\* universal

Drain top made of plastic with universal flange made of plastic (PP) for composite or clamped flange seals

With universal flange to connect composite seals or clamped flange connections Incl. O-ring seal Outer diameter = 110 mm Height adjustment = 12 to 95 mm

Order No.	DU 1
366 00 05	1 pc.

Rs. 1850


TECEdrainpoint S extension Drain top extension made of plastic (ABS)

With O-ring seal Outer diameter = 110 mm Height adjustment = 4 to 85 mm


Order No.	DU 1	
366 00 06	1 pc.	
Rs. 1100		

NEW
















TECEdrainpoint S drain grate frame stainless steel, 100 mm, design grate "quadratum"

Set consisting of drain top with stainless steel grate frame and design grate "quadratum" 100 x 100 mm  $\,$ 

#### Components:

Drain top made of plastic (ABS)

O-ring seal

Outer diameter = 110 mm

Height adjustment = 7 to 89 mm

Grate frame made of drawn stainless steel,

material 1.4301 (304)

Design grate "quadratum" made of stainless steel, material 1.4301 (304), dimension 100 x 100 mm polished surface, load class K3 (load to 300 kg)

366 00 07 1 pc.	

Rs. 8850

TECEdrainpoint S drain grate frame stainless steel, 150 mm, design grate "quadratum"

Set consisting of drain top with stainless steel grate frame and design grate "quadratum"  $142 \times 142 \text{ mm}$ 

#### Components:

Drain top made of plastic (ABS)

O-ring seal

Outer diameter = 110 mm

Height adjustment = 9 to 104 mm

Grate frame made of drawn stainless steel,

material 1.4301 (304)

Design grate "quadratum" made of stainless steel,

material 1.4301 (304), dimension 142 x 142 mm polished surface, load class K3 (load to 300 kg)

Order No.	DU 1
366 00 08	1 pc.

Rs. 15450

TECEdrainpoint S design grate stainless steel 100 x 100 mm, screw-down

TECEdrainpoint S design grate 100 x 100 mm made of drawn stainless steel, material 1.4301 (304) screw-down

#### Components:

Dimension = 100 x 100 mm (outer dimensions)


Polished surface

Load class K3 (load to 300 kg)


Incl. 2 stainless steel countersunk screws and self-cutting threaded bushes

Order No.	DU 1
366 50 00	1 pc.















# TECEdrainpoint S – accessories

TECEdrainpoint S design grate stainless steel 150 mm, screw-down

TECEdrainpoint S design grate 142 x 142 mm made of drawn stainless steel, material 1.4301 (304) screw-down

#### Components

Dimension = 142 x 142 mm (outer dimensions)
Polished surface
Load class K3 (load to 300 kg)
Incl. 2 stainless steel countersunk screws and self-cutting
threaded bushes



Rs. 1950

TECEdrainpoint design grate stainless steel 100 mm TECEdrainpoint S design grate 100 x 100 mm made of drawn stainless steel, material 1.4301 (304)

#### Components:

Dimension = 100 x 100 mm (outer dimensions)
Polished surface
Load class K3 (load to 300 kg)



Rs. 1000

TECEdrainpoint design grate stainless steel 150 mm
TECEdrainpoint S design grate 142 x 142 mm made of drawn stainless steel, material 1.4301 (304)

#### Components:

Dimension = 142 x 142 mm (outer dimensions)
Polished surface
Load class K3 (load to 300 kg)

Order No.	DU 1
366 50 03	1 nc

Rs. 1850

TECEdrainpoint S design grate "quadratum" stainless steel, 100 mm


made of stainless steel, material 1.4301 (304)

#### Components:


Dimension = 100 x 100 mm (outer dimensions)
Polished surface
Load class K3 (load to 300 kg)

Order No.	DU 1
366 50 06	1 pc.



















TECEdrainpoint S design grate "quadratum" stainless steel, 150 mm

made of stainless steel, material 1.4301 (304)

#### Components:

Dimension = 142 x 142 mm (outer dimensions) Polished surface Load class K3 (load to 300 kg)



TECEdrainpoint S compression ring set stainless steel Compression sealing ring set for clamped flange connections

#### Components:

Compression ring made of stainless steel, material 1.4301 (304) with pre-drilled hole circle Sealing ring made of cellular rubber 6 stainless steel screws

Order No.	DU 1	
369 00 03	1 pc.	
Rs. 3700		


TECEdrainpoint S Seal System\*\* seal sleeve for composite seals Seal System\*\* sealing sleeve for the execution of a tested and certified connection of the TECEdrainpoint S drain of the composite seal

#### Components:


PP fleece (top and underside) and inner waterproof PE foil Dimension =  $480 \times 480 \text{ mm}$ 

Order No.	DU 1
369 00 04	1 pc.









## TECEdrainpoint S – accessories

TECEdrainpoint S cut-to-size sealing foil EPDM for clamped flange connections

Seal sleeve for the connection of bitumen membrane sheets, polymer bitumen membrane sheets or EPDM sealing strips using hot-air welding, full-area welding or gluing with PU adhesive. The seal sleeve is fixed on the universal flange with the compression ring set.

Material: EPDM with insert of glass cloth, underside with polymer-modified bitumen layer and fine quartz coating

Dimension =  $500 \times 500 \text{ mm}$ Material thickness = 3.1 mm

Manufacturer: Phoenix Restrix Classic

Please order separately:

Compression sealing ring set (order no. 369 00 03)

Order No.	DU 1
369 00 06	1 pc.
Rs. 4700	

TECEdrainpoint S membrane odour trap

Odour trap made of plastic (PP) with inner sealing lip membrane to protect against evaporation, odour and vermin barrier

Can be used for all horizontal and vertical drains Two-stage odour trap with sealing water and sealing lip membrane

Order No. 369 50 02 Rs. 2250	Dimension for super flat drains	<b>DU 1</b> 1 pc.
369 50 05 <b>NEW</b>	for standard and vertical drains DN50 and drains DN70	1 pc.
369 50 06 <b>NEW</b>	for drains DN 100	1 pc.

TECEdrainpoint S hair trap

made of plastic, for insertion in the TECEdrainpoint S drain

Order No.	DU 1
369 00 05 <b>NEW</b>	1 pc.

Rs. 750


TECEdrainpoint S assembly feet, sound-insulated

To make it easy to adjust height and for fixation in the bare-wall fitting stage of Drainpoint S drains with Seal System\*\* universal flange.

Adjustment range lower edge of the foot to the upper edge of the universal flange 64 to 165 mm.

Consisting of 4 assembly feet incl. sound-proofing element and mounting  $% \left( 1\right) =\left( 1\right) +\left( 1\right) +\left($ 

Order No.	DU 1	
369 00 07 <b>NEW</b>	1 set (4 pcs.)	
Rs. 1200		



□ 500







# :CEdrainpoint

### PVC adapter

Adapter for connection to PVC waste water pipes, DN 40.

Dimension	Order No.	DU 1	DU 2	DU 3
DN 40/DN 40	369 00 00	1 pc.	70 pcs. 1120	pcs.



### PVC adapter

Adapter for connection to PVC waste water pipes, DN 50 to DN 40.

Dimension	Order No.	DU 1	DU 2	DU 3
DN 50/DN 40	360 00 01	1 nc	70 ncc 1120	) nce



### PVC adapter

Adapter for connection to PVC waste water pipes, DN 50 to DN 50.w

Dimension	Order No.	DU 1	DU 2	DU 3
DN 50/DN 50	369 00 02	1 pc.	70 pcs. 1120	pcs.



# TECEdrainpoint S - spare parts





### Odour traps

Order No.	Description	
369 50 00	Odour trap extra-flat made of PP for horizontal drains DN 50 extra flat	Rs. 600
369 50 01	Odour trap standard made of PP for horizontal and vertical drains DN 50 standard, DN 70 and DN 100	Rs. 750
369 50 04* NEW	Odour trap standard made of PP for horizontal and vertical drains DN 100 NEW	

### O-ring seal

Order No.	Description		
369 50 03	O-ring seal for drain top with 110 mm		
NEW		Rs. 90	